

TECHNICAL DATA SHEET



KAYAPP


Product Name **SoilSaver®**
 Reference No: DS ERSN 0363-07/2011 Rev 3
 Date of Issue 8 June 2018
 Description 100% natural jute fibre

Length	68.5 metre lapped rolls or bales as required	
Width	1.22 m	
Thickness	5 mm approximate / m ²	
Open Area	65% approximate	
Weight	g/m ²	292
Construction (plain open weave, single yarn)	Warp Threads/100 mm	10.8
	Weft Threads/100 mm	12.0

INSTALLATION PROCEDURE

- Level the area, removing rocks, roots, etc. to allow maximum soil contact with **SoilSaver®**
- It is recommended to construct a berm at the shoulder of the embankment so as to divert the excess stormwater away from the slope
- Lay **SoilSaver®** loosely to take up soil contours
- Do not stretch it between anchor points
- Laying down the slope is easily achieved by releasing rolls of **SoilSaver®** from the top of the slope. Successive rolls should be overlapped by 150 mm.
- When rolling out the **SoilSaver®**, the beginning of the roll should be anchored in a furrow, 150 mm deep, lock trench.

Use 3 pegs across the width at 1.2 metre intervals over the entire installation.

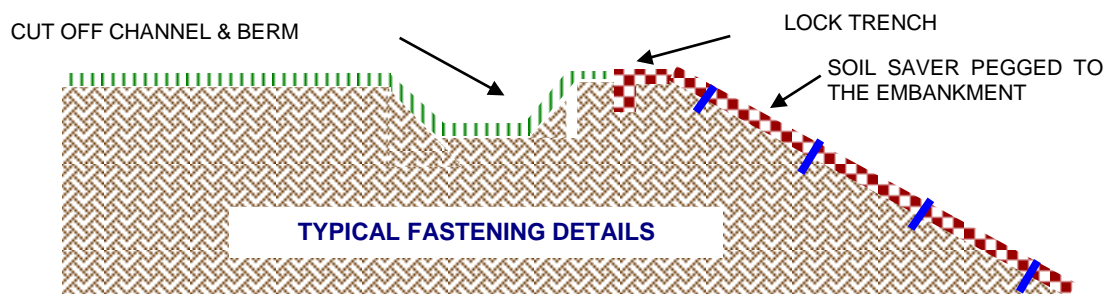

The above results represent laboratory averages

Kaytech reserves the right to make technical modifications to its products

The information given in Kaytech's documentation is to the best of our knowledge true and correct. However, new research results and practical experience can make revisions necessary. No guarantee or liability can be drawn from the information mentioned herein. Furthermore, it is not Kaytech's intention to violate patents or licenses.